

English

HA-7006 HA-7009 HA-7041

AL-HARAMEEN  **الحرمين**

Table of Contents


Main Features.....	1
Overview Main Functions of Keys.....	2-7
Main Menu.....	8
Main Menu Descriptions.....	9
Setting Time, Calendar, and City.....	10
Adding a New City.....	11
Azan Edit.....	12
Azan sound Control.....	13
Azan Taqweem Systems.....	14
Qibla Direction	15
Setting Prayer Alarms.....	16
Muazzen Voice & turn on/off Doaa.....	17
Frequently Asked Questions.....	18

Main Features

- Complete azan for all prayers with volume control.
- Prayer times for most cities in the world.
- Multiple azan sounds with prayers.
- Prayers alarm changes automatically according to azan time.
- Daily alarm that can be adjusted to ring only in working days.
- Qibla direction.
- Hijri and Gregorian calendar, with show weekdays.
- Time display in 12 hours (AM/PM) or 24 hours.
- Two languages (English and Arabic).
- Knowing moon age.
- Temperature indicator.
- Automatic daylight-saving time option.
- Snooze option (every 5 minutes).
- Full screen Led-Light.

Overview and Main Functions of Keys

Model: HA-7006

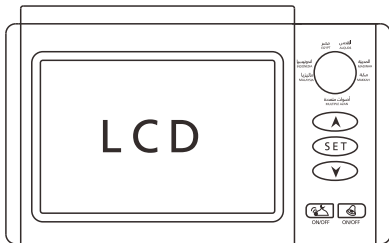

1. Press "▲" one time to display Calendar, azan time, and other most used functions on the main screen.

SET

1. During setting, press "SET" one time to confirm the selection condition.
2. Press for 2 seconds to adjust time and select the year, month, day, and city.



3. Press "▼" one time for 2 seconds to hear azan sound.



Turn on/off daily alarm.



Turn on/off azan alarm.




Multiple sound: press one time to select muezzin and turn Duaa on and off

Multiple sound: press one time for 2 seconds to turn azan on or off

Overview and Main Functions of Keys

Model: HA-7006

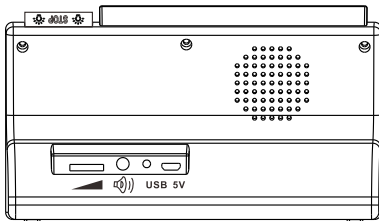

STOP button (STOP)/LED Light

USB 5V Power plug: 5V USB plug to turn on clock



Speaker Jack: to connect clock with external speaker



Volume control key: to turn sound up and down

Overview and Main Functions of Keys

Model: HA-7009



UP
أعلى

1. Press "▲" one time to display Calendar, azan time, and other most used functions on the main screen.

SET
ضبط

1. During setting, press "SET" one time to confirm the selection condition.
2. Press for 2 seconds to adjust time and select the year, month, day, and city.

DOWN
أسفل

3. Press "▼" one time for 2 seconds to hear azan sound.

ALMUAZIN
المؤذن

- Multiple sound: press one time to select muezzin and turn Duaa on and off
- Multiple sound: press one time for 2 seconds to turn azan on or off



Turn on/off azan alarm.

Overview and Main Functions of Keys

Model: HA-7009



STOP button (STOP)

USB 5V

Power plug: 5V USB plug to turn on clock




Speaker Jack: to connect clock with external speaker



Volume control key: to turn sound up and down




Reset :to reset the clock to factory settings

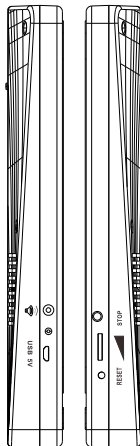

Overview and Main Functions of Keys

Model: HA-7041



1. Press "▲" one time to display Calendar, azan time, and other most used functions on the main screen.

SET


1. During setting, press "SET" one time to confirm the selection condition.
2. Press for 2 seconds to adjust time and select the year, month, day, and city.



3. Press "▼" one time for 2 seconds to hear azan sound.

Overview and Main Functions of Keys

Model: HA-7041

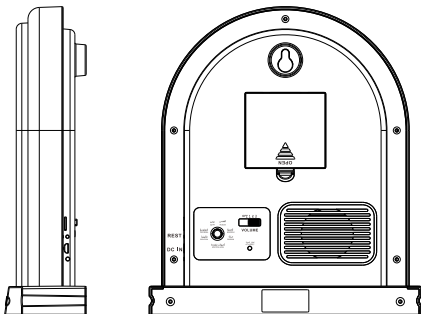

DC IN Power plug: DC plug to turn on clock



Volume control key: to turn sound up and down



Reset :to reset the clock to factory settings




Multiple sound: press one time to select muezzin and turn Duaa on and off

Multiple sound: press one time for 2 seconds to turn azan on or off

Main Menu

To move between lists, use (▲) or (▼) button. For adjusting, press "SET" button.

Pressing on (▲) button displays:

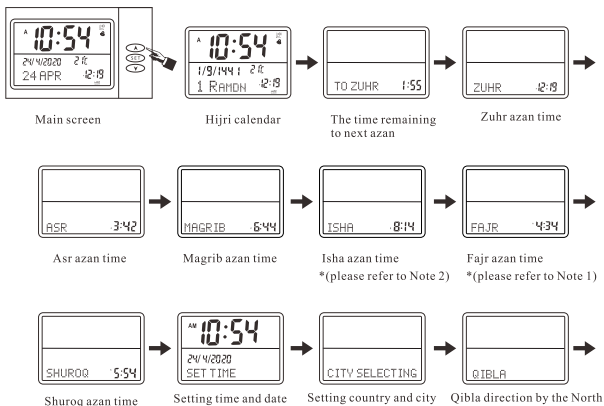


Note 1:

- It will show "LAST THIRD OF THE NIGHT" when wait for 3 seconds during "Fajr" azan time.

Note 2:

- It will show "MIDDLE OF THE NIGHT" when wait for 3 seconds during "Isha" azan time.


Main Menu Descriptions



Language select
(English or Arabic)



Calendar select
(Hijri or Gregorian)
to be displayed
on the screen



To change temperature
from Fahrenheit to
Celsius and vice versa




Time can be
displayed either in
12 hours (AM/PM)
format or 24 hours



Adjusting Clock to display
azan time or Iqama instead
of azan time or displaying
them together alternatively




Turning on/off
azan sound
separately



Selecting reliable azan
Taqweem in the clock




Editing azan times
by a fixed number
of minutes




Daily alarm as a reminder
for fixed times every day



Selecting alarm
sounds and duratio



Automatic selecting
for DST or current
time in your city





Knowing moon age



Setting Time, Calendar and City

Main Screen

To adjust and edit, press "SET" button. To move between lists, use (▲) or (▼)

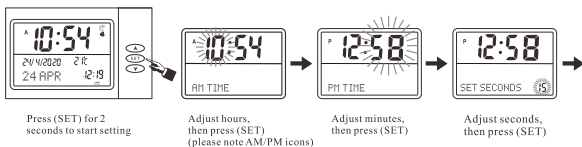

Notes:

- After setting the Gregorian calendar, Hijri calendar will automatically change.
When necessary, you can increase or decrease Hijri date one day.
- If your city is not listed, follow steps in page 11

Adding a New City

This clock can be used anywhere around the world, where you can directly select your city by selecting the country and the city according to the alphabetical order and city code.

If your City location is not one of the major listed cities, you can add your location to the list (NEW CITY) using longitude, latitude, and GMT information.

For example, the following steps show how to add the city of Altaif in Saudi Arabia, which located on (40 41E) longitude, (21 25N) latitude, and (GMT+3: 00) :

1. Use (▲) button to move between the lists till you reach the list of city selecting, then press "SET" button for 2 seconds to adjust the setting of the city.
2. Select Saudi Arabia, then press "SET" button. Use (▼) button to select a new city, then press "SET" button.
3. Use (▲) or (▼) to set longitude to be (40E), then press "SET" button.
Use (▲) or (▼) to set minutes to be (41E), then press "SET" button.
4. Use (▲) or (▼) to set latitude to be (21E), then press "SET" button.
Use (▲) or (▼) to set minutes to be (25N), then press "SET" button.
5. Use (▲) or (▼) to set GMT difference in hours to be (+3:00), then press "SET" button. Use (▲) or (▼) to set GMT difference in minutes to be (+3:00).
6. To finish selecting, press "SET" button.

Note:

If azan times are not correct, check city's coordinates, time difference, Gregorian date, and select the appropriate Taqweem for your city.

If you find any differences after setting the city, you can edit times as mentioned on azan edit page.

If you want more information about how to adjust city settings, visit our website: www.hrm2003.com

Azan Edit

You can edit time of any azan forward or backward in Al-Harameen clock by a fixed number of minutes when needed, as follows:



1. Use (▲) button to move to Azan Edit list, and then press on "SET" button for 2 seconds to start adjustment.
2. Use (▲) or (▼) to adjust safety time (in minutes) of Fajr azan
(Note Fajr azan time display on the screen), then press "SET" button.
3. Use (▲) or (▼) to adjust safety time (in minutes) of Shuroq alarm,
then press "SET" button
4. Repeat the above steps as desired for the other azan times.

Note:

After changing the city, safety times will be removed for all azan.

Azan Sound Control

In Al-Harameen clock, you can turn on/off azan sound separately as desired.

(🔊) azan sound icon on the main screen indicates that the sound of this prayer is on (with this azan particularly).



To adjust azan sound to be always turned on or off or to stop a specific azan sound and play another, follow these steps:

Use (▲) button to move to azan sound screen, and then press "SET" for 2 seconds to start adjustment. Press (▲) or (▼) button to turn Fajr azan on or off, then press "SET".

Press (▲) or (▼) button to turn Shuroq alarm on or off, then press "SET".

The same thing with the rest of azan sound.

To finish adjustment, press "SET".

Note:

The same steps are applied on the rest of azan sounds.

Azan Taqweem Systems

Al-Harameen clock uses the local (or the most widely used) Taqweem system to calculate azan time for each city. To select another Taqweem, follow the steps below:



Press on (▲) button several times to reach the screen of selecting Taqweem.

Press on (SET) button for 2 seconds to enter Taqweem setting mode.

Use (▲) or (▼) to select the desired Taqweem, then press (SET) to confirm.

Main Taqweem Systems:

DEFINE: DEFINE Local Taqweem (the most widely used)

MSLM LG: MSLM LG Muslim World League.

KARACHI: KARACHI.

ISNA: ISNA Union Islamic Society of North America.

EGYPT: EGYPT.

UMALQURA: UMALQURA.

UMALQURA 18: UMALQURA 18.

UMALQURA 15: UMALQURA 15.

HANAFI: HANAFI University of science Islamic in Karachi.

FIXED: FIXED 1:30 fixed time. Fajr time is determined as a fixed interval of time before Shuroq time. Isha time is determined as a fixed interval of time

HANAFI: HANAFI University of science Islamic in Karachi.

after Magrib azan. This system is often used in Northern Europe.

(Isha 1:30 after Magrib / Fajr 1:30 before Shuroq).


Note: Taqweem system will reset after changing the city.

Qibla Direction

Al-Haramain clock is equipped with a digital compass, which can be used to determine Qibla direction relative to North, and to determine it accurately, the clock displays the exact Qibla angle between 0 to 360° clockwise.

To display Qibla direction, press (▲) button several times from the main screen to reach to Qibla direction screen, then press "SET" for 2 seconds to display Qibla direction relative to North (N).

Point the right side arrow towards the North, in this position, the left side arrow points to Makkah direction.

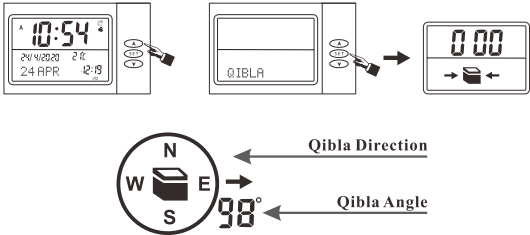

Qibla Compass (General Notes):

- **In Makkah city, the Qibla is displayed as → 📖 ← on Qibla screen (Note that within Makkah city, different locations have different Qibla directions).
- **The clock displays the true north angle (Not magnetic north).
- **The clock returns to the main screen when pressing on (SET) on the Qibla screen, or when not pressing any button for 30 seconds.

Setting Prayer Alarms

In addition to azan alarm, this clock has prayer alarms that are useful as reminders of Eqamah or Salat time.

Each prayer alarm can be set to ring before or after azan time at a fixed interval. Moreover, each alarm can be set to turn on or off.

 Prayer alarm icon on the main screen indicates that prayer alarm is on (for that particular azan).



Example: To set Zuhr prayer alarm to always ring after the azan by 15 minutes.

press (▲) button several times from the main screen to reach to Zuhr azan screen, then Press "SET" for 2 seconds to start prayer alarm adjustment.

Press (▲) or (▼) to adjust Zuhr prayer alarm time, then press "SET".

Press (▲) or (▼) to turn on/off alarm sound, then press "SET" to finish adjustment.

The same steps are applied on the prayers to set the alarm of each prayer to ring after or before azan time at a fixed interval.

Note: In the original clock setting, the alarm will ring at every azan time.

Choose Muazzen Voice & turn on/off Doaa


In Al-Harameen clock, you can choose azan voice (Muazzen) for all prayers and each separately, according to the desire to do so, choose through a set of Muazzen voices in al-harameen clock, and turn on / off Azan Doaa.

To choose the muazzen's voice specifically to work with this prayer, and turn on / off Azan Doaa, follow these steps:

From the main screen, double click on the (Multiple Azan) button to select the Muazzen Voice and turn on / off Azan Doaa,

Then press and hold the "SET" button for two seconds to start setting and selection.

To set and select, press the "SET" button, and to move between prayers use (▲) or (▼) button.



Press (▲) or (▼) button to select Fajr prayer and then press "SET" button to choose the muazen and turn on / off Fajr Azan Doaa.

Press (▲) or (▼) button to select Zuhr prayer and then press "SET" button to choose the muazen and turn on / off Zuhr prayer Doaa.

Thus, the same steps are applied to the rest of prayers in this clock to set & choose the muazen and turn on / off Azan Doaa, separately, as desired.

Frequently Asked Questions

Q: Azan times are not correct ?

A: Make sure you have correctly set the following: a)city&country b) Gregorian calendar c)Daylight saving time option d)Taqweem system (azan time calculation methods)

Q:How can I set the clock to beep 10 minutes before Magrib azan everyday ?

A: Suppose today's Magrib azan is at 6:00 PM. Set Magrib alarm reminder to 5:50 PM. (see Setting prayer alarms in the user's guide). After this initial setting,Magrib reminder will be automatically adjusted everyday to beep 10 minutes before the azan. Note : You can set reminder for any prayer for a fixed interval before or after azan time.

Q: I want to adjust the clock on my city, but I did not find it within the "List of cities"?

A: Look for your city in the website , and if you do not find your city on the website, you can enter the latitude & longitude and time difference of GMT or send it via an e-mail to **info@al-harameen.com** explaining the name of your city and your country.

Q: In my city, the time of Fajr Azan is specific of a fixed period of 1:40 before sunrise. In respect of Isha, also is specific of a fixed period of 1:45 after Maghrib time. How do I set this system?

A: First, select fixed 1:30 Taqweem system, refer to Taqweem system and then manually adjust the reserve time of Azan Fajr by 10 minutes and Isha by 15 minutes see safety time setting. Pls. **refer to user guide**.

Q: Why there is a difference of one hour in times of prayer "Azan"?

A: Make sure the daylight saving time option (DST on or off),. Pls. **refer to user guide**

Q: My clock doesn't play in the proper timing specially Fajr Azan?

A: Make sure that the time is AM or PM when set the time.

Q: Does the "Qiblah Direction" mean that the arrow refer to the actual direction of the Qiblah, regardless of any direction of the clock?

A: Not like this, the arrow refers to the direction of Qiblah relative to True North. By other meaning, you need to know the direction of the north, and thus you will be able to determine the direction of Qiblah "Mecca".